


- Driver Support For All The Current Operating Systems
- A+ Quality LED Backlight Panels
- 10-Finger-Multi Touch Capacitive Touch Panel
- The Most Common Video Connectors Available
- High Resolution LCD Panels
- Reinforce Front Glass
- 1 Year Gurantee

 **32"**

Zuljana’s Capacitive Touch Monitor series has a modern sleek look with its flat edge to edge glass front panels. This new series come with capacitive 10-finger multitouch, glass front reaching MosH 7, the glass surface is anti glare treated (chemical ethed), a wide variety of connectors including USB-B for touch, HDMI, VGA and Audio inputs, all lockable including the DC-In.

Each capacitive Touch Monitor has an A+ industrial LCD panel backed by Zuljana’s 100% no dead pixel guarantee. Each monitor from 13.3" and up comes with its own desktop stand, and screw patterns on the back for VESA 100 mounts. The high resolution support (e.g. 768p, 1920 × 1200 pixels) of the Zuljana touch devices make them the perfect choice for a wide variety of applications including POS systems, as control panels in industrial fields, in kiosk systems, for office/residence automation and many other areas. The projected 10-point capacitive touch panel is accurate and responsive. The touch function is quickly established when connected via USB port.

Zuljana includes touch drivers for popular OS (Win 10), Mac, Android and Linux. Normally, no touch driver needed for Win 7, 8 and 10. The virtual keyboard and windows gesture makes windows convenient to use. Besides, embedded systems, such as Raspberry Pi, are supported as well.



Ordering information	
32"LCD,350 nits(Optional),1000:1,1920×1080 pixels,69.84(H)×39.29(V),LED Backlight	

Product name	32"Capacitive Touch Monitor
Model Number	ZL320TMBCAP

IP Rating	
IP 65 Front / IP40 Back	



LCD Panel	
Screen Diagonal (Inch/cm)	32/80.01
Active Display Area(cm)	69.84(H)×39.29(V)
Aspect Ratio	16:9
Physical Resolution	1920×1080
Maximum showable resolution	1920×1080
Colours Displayed	16.7M
Brightness (cd/m <sup>2</sup> )	350
Contrast	3000:1
Typical Reaction Time Tr/ Tf (ms)	6/1
Visual Angle Horizontal/Vertical (°)	178/178
Backlight/Backlight Lifetime (hours)	LED/30,000

Touch Panel	
Touch Technology	Projected Capacitive 10-point Multitouch
Touch Panel Drivers	Windows; Linux; Mac; Android
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Surface Treatment	Anti-glare (optional)
Glass Strengthening	Tempered glass

Operation/Mechanical	
Operating Temperature (°C)	-10~+60
Humidity Range (RH)	10%-90%
Net Weight(Kg)	13.50
Gross Weight(Kg)	19.50(Incl.cartonage)
Housing Material	Aluminum front/back case
Housing(cm)L×W×H	75.40 × 44.84 × 4.00
Mounting	VESA 200

Power	
Power Indicator	Green LED
Power Supply	100-240V ACDC Active Switching; 12V DC-Out
Working Power (V)	24
Working Power (V)	65
Stand-By Consumption	<1

External Connectors	
Video	1×HDMI 1.3 (Incl.HDCP)
	1 × DVI-D
	1 × VGA
Audio	1×PC-Audio
Touch Connector	1×USB
Connectors	1×12V DC-IN

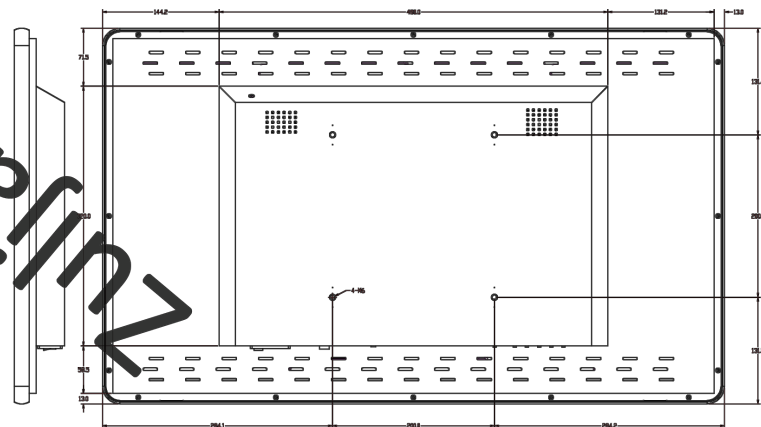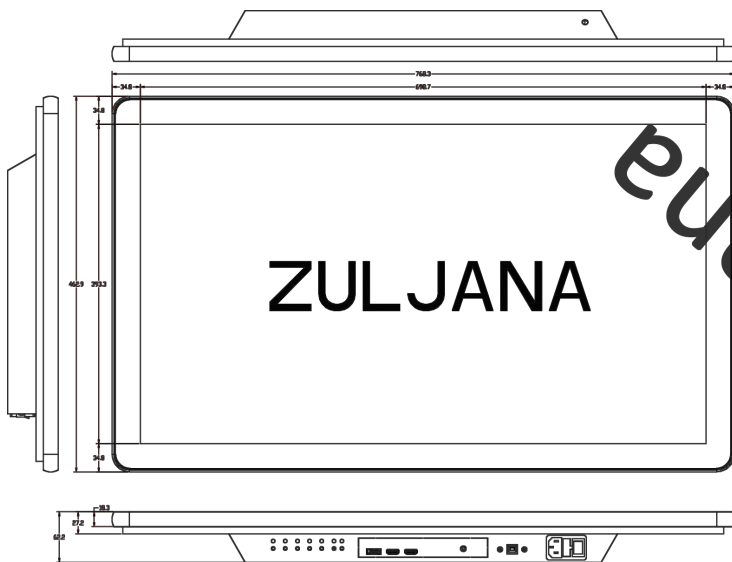

Product Measurement,mm  
Tolerance :±1mm

Shenzhen BaoBao Industrial Co., Ltd

Tel: +86 0755 23775660

Email: sales@baobao-industries.com

Website: www.baobao-industries.com

Website: www.baobao-industries.com

Address: 2 / F, Building B, Xinzhongtai Science and Technology Park,  
Guangming New District, Shenzhen