

ZULJANA'S

Touch Screen **POS** System

ZLX101POS



HIGHLIGHTS:

- intel® Core™ i3-3217U.
- 15" Bezel-Free Display with PCAP Touch & LED Backlight.
- Fanless design for quiet operation.
- Spill and Dust Resistant. Complete FAN Free with innovative heat pipe design (Fanless).
- Full Aluminum Die-casting Cabinet.
- Completely Refined Design. Elegant & Robust Dual Hinge (Foldable).
- Swappable System Box.

The Next POS Generation is Here

Zuljana Pos System Terminals comes equipped with all of the features and computing performance you need to run a successful business. Supporting an Intel Core i3-3217U this all-in-one terminal packs power.

The rackable motherboard provides an easy service and upgrade path, ensuring reduced downtime and scalability. or contact us to send you!. Equipped with a True Flat, Projected Capacitive Touchscreen, the BaoBao Industrial All-In-One System is available with 15" 15.6" 17" screen size.

Technical Specification

ZLX101POS			
CPU	intel® Core™ i3-3217U	Interfaces	1 x Display port (USB-C)
Operating System	Windows 7,8,8.1,10 Pro, Linux, Android		1 x Gigabit Ethernet, RJ-45
Working Memory	4 GB Standard DDR3		5 (Rear 5, USB 3.0 x 2, USB 2.0 x 2, USB C type x 1)
System Memory	32,64,128,256 GB SSD		3 (Reserved for MSR, SCR, i-Button/Touch Controller)
Operator Display	15" TFT-Display		1 x RJ-11 (Integrated circuit GPIO)
	Aspect Ratio: 4:3	1 x Line-out	
	Capacitive Touch Screen		
	Resolution: 1024 x 768 px		
	VFD, 20 Columns x 2 Lines	Weight	7.75 kg
Power Supply	Adaptor 12V, 5A / 24V, 6.35A	Dimensions	500 x 470 x 300 (mm), 19.6 x 18.5 x 11.8 (in)
		Operating Temp	-20 °C ~ 60 °C at 10% to 90% Humidity
		Storage Temp	-20 °C ~ 80 °C at 10% to 90% Humidity



MSR/Card Reader




Fan-Less



Splash-Proof



I/O Interfaces

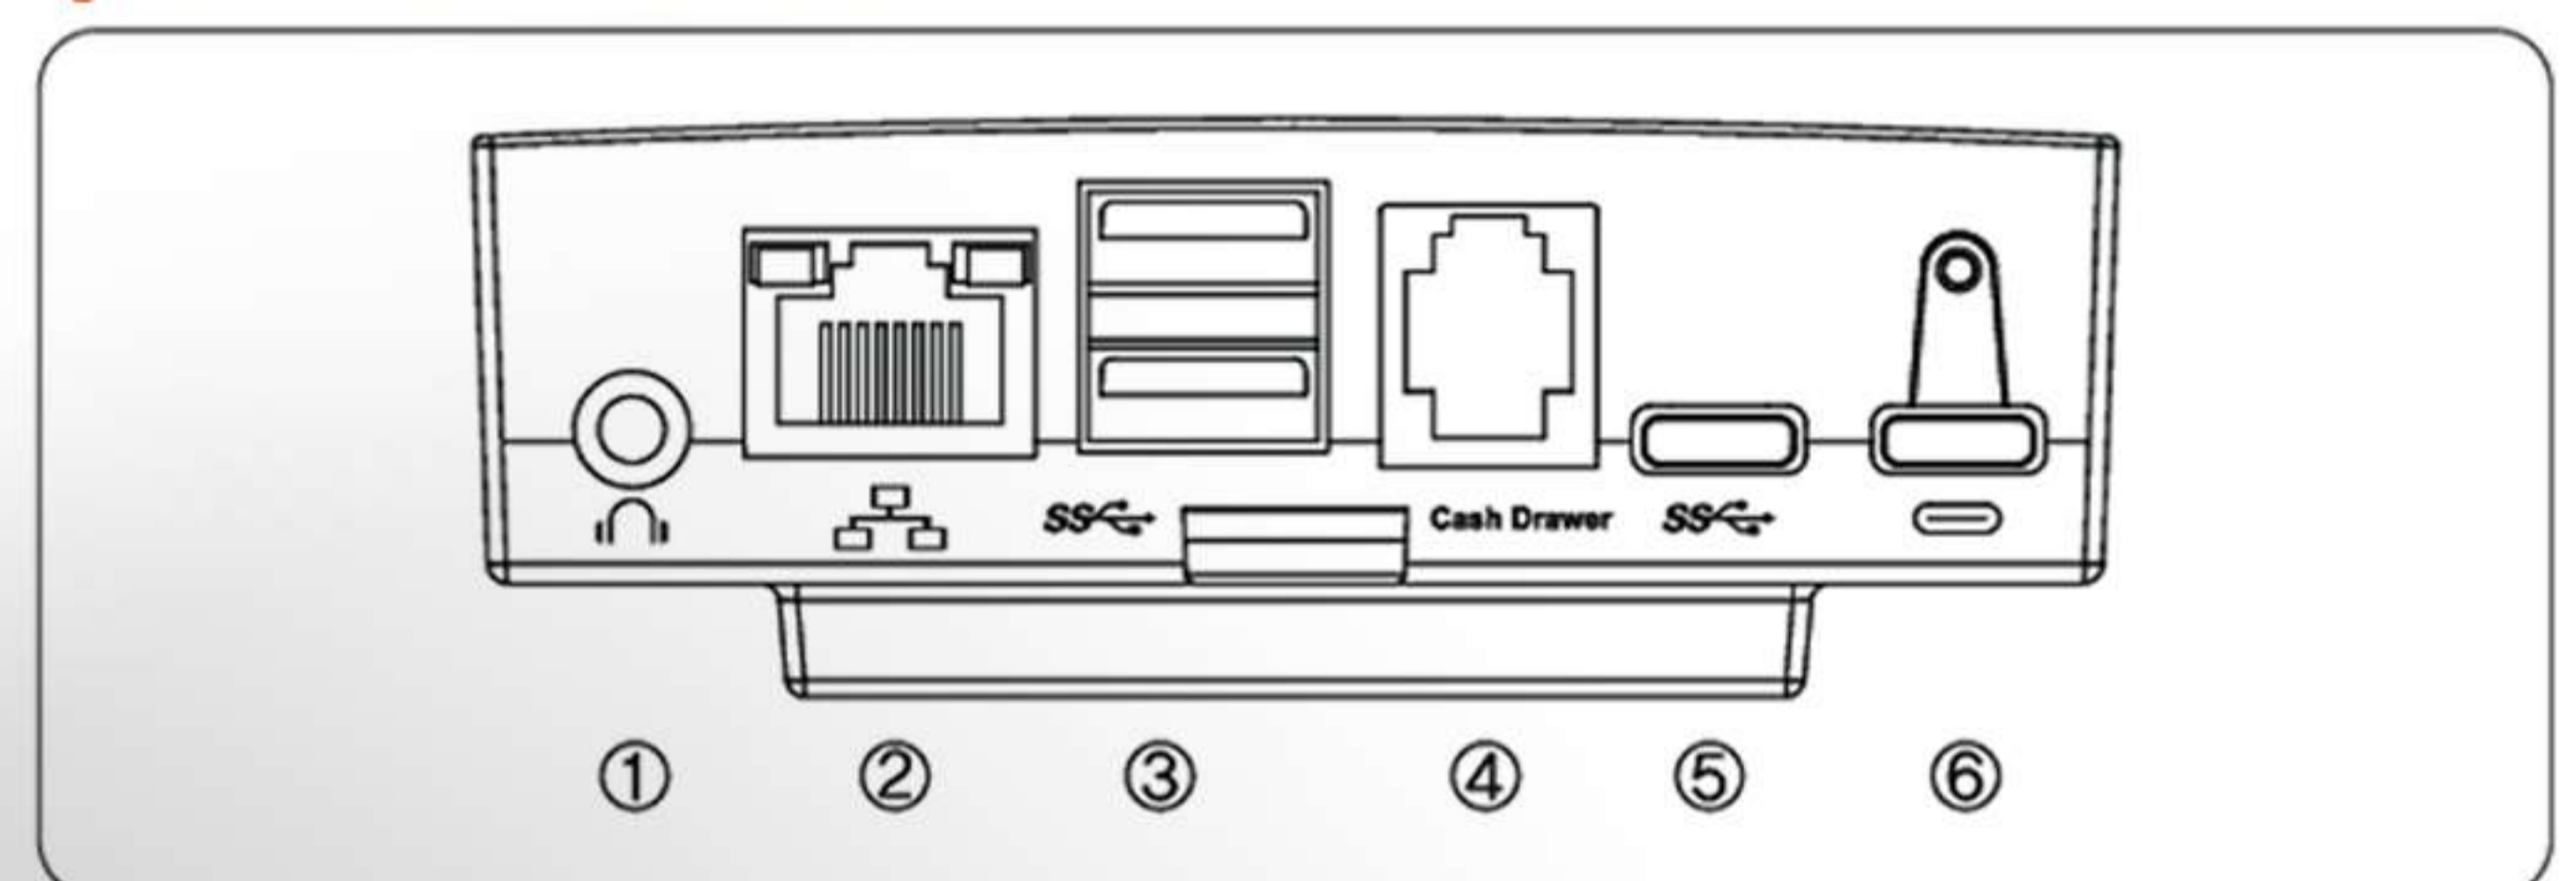

- ① AUDIO OUT
- ④ RJ - 11 X 1 (Cash Drawer)
- ② LAN
- ⑤ USB C X 1
- ③ USB 3. 0 X 2
- ⑥ USB C X 1 (DC-IN)