

ZULJANA'S INTERACTIVE DIGITAL SIGNAGE ZL116PC-A



INTERACTIVE DIGITAL SIGNAGE FOR TOUCH AND GESTURE

Turn your boring Digital Signage— that everybody usually strolls past— into a genuinely interactive “Touch” experience for more significant customer interaction. Engage audiences with digital signage and empower administrators with remote content management. Our Interactive Digital Signage includes a broad selection of interactive signages from 7-55 inches. The Zuljana interactive signage delivers a professional-grade full HD display, enables a thinner and smaller kiosk design for applications even with limited space.



Intractive Digital Signage Features

- ▶ Commercial Digital Signage
- ▶ Quad-Core Rockchip 3288/3399
- ▶ Support Android 8.1/9.0
- ▶ HD Video 1080P
- ▶ Support Vertical and Horizontal Screen
- ▶ Outstanding image quality
- ▶ Easily integrated
- ▶ Desktop or wall mounting

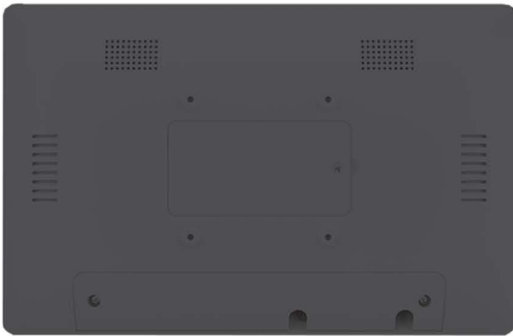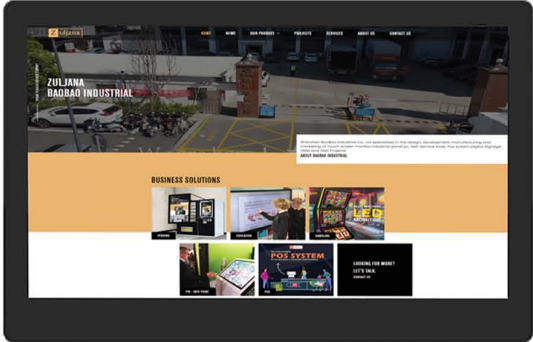

Ordering information

11.6"LCD,250 nits(Optional),700:1,1920×1080 pixels,25.67(H)×14.44(V),LED Backlight

Product Name 11.6" Interactive Digital Signage
Model Number ZL116PC-A

LCD Panel

Screen Diagonal (Inch/cm) 11.6/29.46
 Active Display Area(cm) 25.67(H)×14.44(V)
 Aspect Ratio 16:9
 Physical Resolution 1920×1080
 Maximum showable resolution 1920×1080
 Colours Displayed 16.7M
 Brightness (cd/m²) 250
 Contrast 700:1
 Typical Reaction Time Tr/ Tf (ms) 10/15
 Visual Angle Horizontal/Vertical (°) 150/145
 Backlight/Backlight Lifetime (hours) LED/20,000

Touch Panel

Touch Technology Projected Capacitive 10-point Multitouch
 Touch Panel Drivers Windows; Linux; Mac; Android
 Touch Life (Contacts) Unlimited
 Surface Hardness 7H
 Surface Treatment Anti-glare (optional)
 Glass Strengthening Tempered glass

IP Rating

IP65 Front / IP40 Back

Android System


CPU Chipset Quad-core Cortex-A17 1.8GHz, RockChipRK3288
 System Memory 2 GB
 Flash Memory 16 GB
 Communication Ethernet RJ45,Wi-Fi 802.11 b/g/n, Bluetooth 4.0,4G(optional)
 Input/Output DC In,HDMI Output ,3.5mm Audio Jack,Micro USB OTG,USB 2.0 host,RJ45,-POE,SD Card Slot,Microphone
 OS Android 8.1/9.0

Operation/Mechanical

Operating Temperature (°C) -10~+60
 Humidity Range (RH) 10%-90%
 Net Weight(Kg) 0.54
 Gross Weight(Kg) 1.10(Incl.cartonage)
 Housing Material Plastic Case
 Housing(cm)L×W×H 28.91 × 18.68 × 3.05
 Mounting VESA 75

Power

Power Indicator Green LED
 Power Supply 100-240V ACDC Active Switching; 12V DC-Out
 Working Power (V) 12
 Working Power (V) 8
 Stand-By Consumption <1

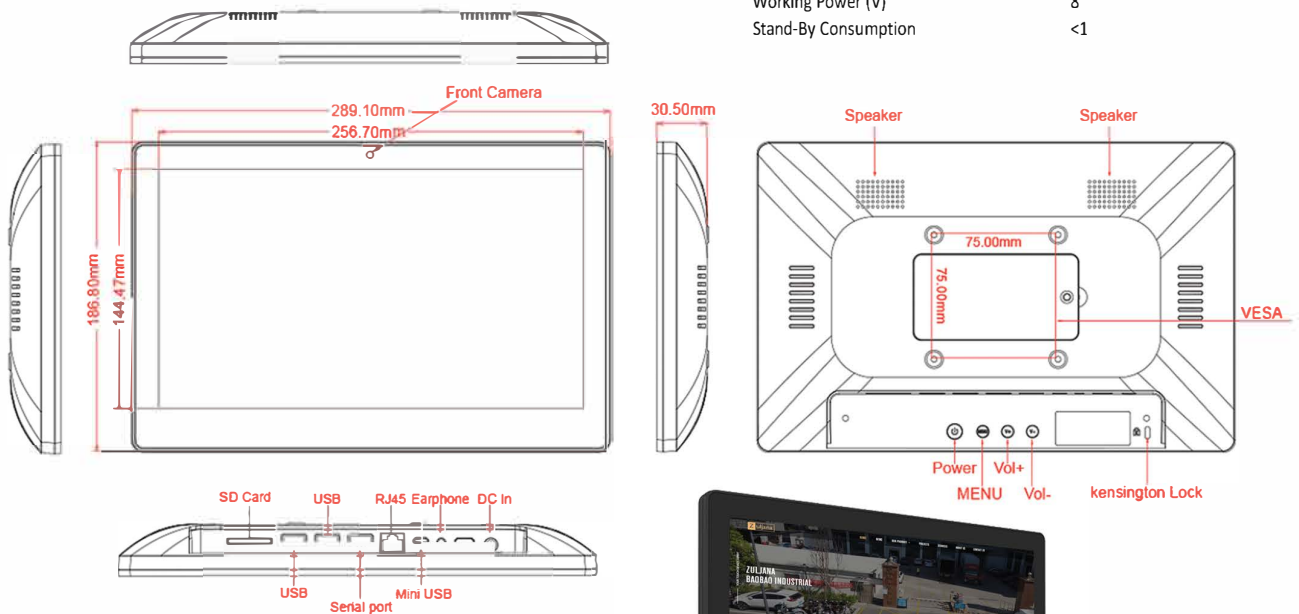

Learn more about Zuljana at baobao-industries.com

+86 755 23775660
 +86 755 23779143
 sales@baobao-industries.com
<https://www.baobao-industries.com>

