

# ZULJANA'S OPEN FRAME TOUCHSCREEN MONITORS ZL156TMCAPOF

## OPEN FRAME COMMERCIAL TOUCH SCREEN MONITORS


Zuljana Open Frame Touchscreen Monitors are the perfect choice for commercial as well as organization applications. The Open Frame Touchscreen Monitors capacitive 10-finger multitouch panel brings an easy making use of experience for a wide variety of applications.

When it involves considerable ease, reliability, durability, and user-friendliness, it will undoubtedly be the advantage of Zuljana open frame touchscreen monitors displays.



### Open Frame Touchscreen Monitors Features

- ▶ Driver support for all the current operating syst
- ▶ A+ quality LED backlight panels
- ▶ 10-Finger-Multi Touch Capacitive Touch Panel
- ▶ Patented IP65 front with silicon seal
- ▶ The most common video connectors available
- ▶ High resolution LCD Panels
- ▶ Reinforced front glass
- ▶ 1 year guaranteee

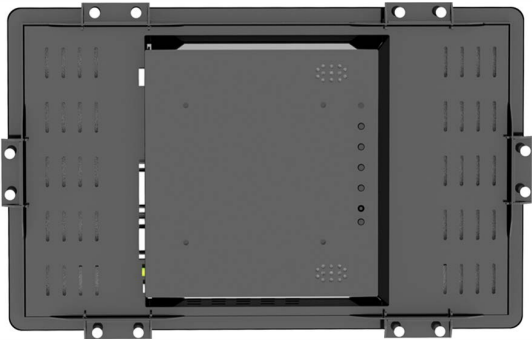

## Ordering information

15.6" Open Frame Capacitive Touch Screen Monitor

## IP Rating

IP65 Front / IP40 Back

## LCD Panel

Screen Diagonal (Inch/cm)	15.6/39.6
Active Display Area(cm)	34.42×19.36
Aspect Ratio	16:9
Physical Resolution	1920×1080
Maximum showable resolution	1920×1080
Colours Displayed	262K
Brightness (cd/m2)	1000
Contrast	800:1
Typical Reaction Time Tr/ Tf (ms)	15/15
Visual Angle Horizontal / vertical (°)	170/170
Backlight/Backlight Lifetime (hours)	LED / 30,000

## Touch Panel

Touch Technology	Projected Capacitive 10-point Multitouch
Touch Panel Drivers	Windows; Linux; Mac; Android
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Surface Treatment	Anti-glare optional
Glass Strengthening	Tempered glass

## Product Name

15.6" Open Frame Capacitive Touch Screen Monitor

## Model Number


ZL156TMCAPOF

## Operation/Mechanical

Operating Temperature (°C)	-10 - +60
Humidity Range (RH)	10%-90%
Net Weight(Kg)	2.05
Gross Weight(Kg)	4.05 (incl. cartonage)
Housing Material	Aluminum
Housing(mm)L x W x H	400.0 × 260.0 × 40.1
Cut-out required (mm) L × H	384.0 × 244.0
Amount of clamps required	8
(optional) Tape length required (mm)	1276.0 (2× 394.0 + 2× 244.0)
(optional) Amount of glue required (ml)	6.38
Mounting	VESA 100

## External Connectors

Video	1x HDMI 1.3 (incl. HDCP) 1x DVI-D 1x VGA
Audio	1x PC-Audio
Touch Connector	1x USB
Connectors	1x Serial 1x 12V DC-In
Power Indicator	Green LED
Power Supply	100-240V ACDC active switching, 12V DC-Out
Working Power (V)	12
Working Power (w)	17
Stand-By Consumption	<1

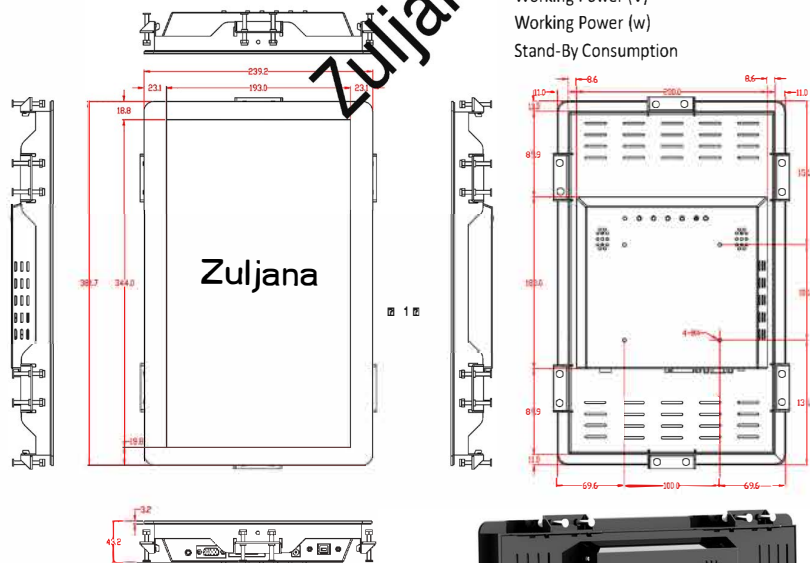

Learn more about Zuljana at [baobao-industries.com](http://baobao-industries.com)

- +86 755 23775660
- +86 755 23779143
- [sales@baobao-industries.com](mailto:sales@baobao-industries.com)
- <https://www.baobao-industries.com>

