

# ZULJANA'S

Touch Screen POS System

## ZLX104POS



### HIGHLIGHTS:

- intel® Core™ i3-3217U.
- 15.6" Bezel-Free Display with PCAP Touch & LED Backlight.
- Fanless design for quiet operation.
- Spill and Dust Resistant. Complete FAN Free with innovative heat pipe design (Fanless).
- Full Aluminum Die-casting Cabinet.
- Completely Refined Design. Elegant & Robust Dual Hinge (Foldable).
- Swappable System Box.

## The Next POS Generation is Here

Zuljana Pos System Terminals comes equipped with all of the features and computing performance you need to run a successful business. Supporting an Intel Core i3-3217 this all-in-one terminal packs power.

The rackable motherboard provides an easy service and upgrade path, ensuring reduced downtime and scalability. or contact us to send you!. Equipped with a True Flat, Projected Capacitive Touchscreen, the BaoBao Industrial All-In-One System is available with 15" 15.6" 17" screen size.

# ZLX104POS

## Technical Specification

| ZLX104POS               |                           |                       |  |
|-------------------------|---------------------------|-----------------------|--|
| <b>CPU</b>              | intel® Core™ i3-3217U     | <b>Interfaces</b>     | 1 x Display port (USB-C)                             |
| <b>Operating System</b> | Windows 10 Pro, Linux     |                       | 1 x Gigabit Ethernet, RJ-45                          |
| <b>Working Memory</b>   | 4 GB Standard DDR3        |                       | 5 (Rear 5, USB 3.0 x 2, USB 2.0 x 2, USB C type x 1) |
| <b>System Memory</b>    | 64 GB SSD                 |                       | 3 (Reserved for MSR, SCR, i-Button/Touch Controller) |
| <b>Operator Display</b> | 15.6" TFT-Display         |                       | 1 x RJ-11 (Integrated circuit GPIO)                  |
|                         | Aspect Ratio: 16:9        |                       | 1 x Line-out   |
|                         | Capacitive Touch Screen   | <b>Weight</b>         | 8.5 kg   |
|                         | Resolution: 1920 x 1080px | <b>Second Display</b> | 10.1" Optional                                       |
| <b>Power Supply</b>     | Adaptor 12V, 5A           | <b>Operating Temp</b> | -20 °C ~ 60 °C                                       |
|                         |                           | <b>Storage Temp</b>   | -20 °C ~ 80 °C                                       |



Dual-Display



Fan-Less



Full-HD



Splash-Proof




Card-Reader



Thermal-Printer  
80mm



### I/O Interfaces

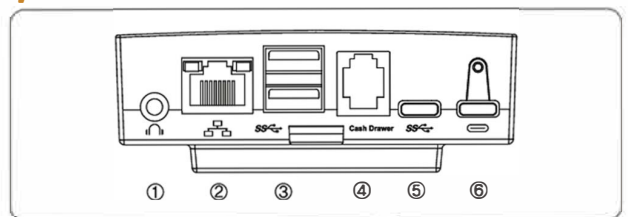

- ① AUDIO OUT
- ④ RJ - 11 X 1 (Cash Drawer)
- ② LAN
- ⑤ USB C X 1
- ③ USB 3. 0 X 2
- ⑥ USB C X 1 (DC-IN)